

MERRICA 🦰 Made in Australia

INSET BATH/SPA BATH WITH TILE BEAD (1525 & 1665) | ISLAND BATH (1653) - Premium Sanitary Grade Acrylic, High Gloss White

Merrica's soft internal lines & generous lumbar area creates the perfect invitation to relax & rejuvenate. Available as an inset bath with a tile bead or as an Island bath, it also features self-supporting feet for easy installation. End waste position.










■ Slip resistant pattern







- 15 YR WARRANTY*
- AS/NZ Standard 2023/1995

CODE

105539

105546

105542

- Steel rod reinforced rim
- Double reinforced bath base



MERRICA SANTAI SPA BATH • 10 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1525 x 735 x 447 (tile bead)	101L	31.5kg	105541
1665 x 735 x 447 (tile bead)	114L	34kg	105549
1653 x 723 x 435	114L	34kg	105545

- 10 YR WARRANTY* SPA SHELL
- 5 YR WARRANTY* PUMP, JETS &
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x low profile Mod centro jets
- 4 x low profile Mod mini jets
- 1 x low profile Mod suction
- 1 x Mod power button (rim mounted) • 2 x Mod air controls (rim mounted)
- 750 watt auto heat boost pump



MERRICA CONTOUR SPA BATH • • 12 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1525 x 735 x 447 (tile bead)	101L	31.5kg	105540
1665 x 735 x 447 (tile bead)	114L	34kg	105547
1653 x 723 x 435	114L	34kg	105543

- 10 YR WARRANTY* SPA SHELL
- 5 YR WARRANTY* PUMP, JETS &
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x flush C-Lenda™ centro jets
- 6 x flush C-Lenda™ mini jets
- 2 x flush C-Lenda™ air controls
- $1 \times \text{flush C-Lenda}^{\text{\tiny{TM}}} \text{suction}$
- 1 x Sensa-Touch pad control (rim mounted)
- 750 watt 3-stage heat boost pump







MERRICA DOLCE VITA SPA BATH ●●● 16 JETS

SIZE (l) x (w) x (d) mm	CAPACITY*	NET WEIGHT	CODE
1665 x 735 x 447 (tile bead)	114L	54kg	105548
1653 x 723 x 435	114L	54kg	105544

- 10 YR WARRANTY* SPA SHELL
- 5 YR WARRANTY* PUMP, JETS &
- AS/NZ Standard AS3861/1991
- Steel rod reinforced rim
- Double reinforced bath base
- 6 x adjustable flush C-Lenda™
- 10 x adjustable flush C-Lenda™ mini jets
- 2 x flush C-Lenda[™] air controls
- 1 x flush C-Lenda™ suction
- Spa Key remote control
- 1100 watt spa key heat boost pump


*Capacity 200mm below the bath rim

				Capacity 20011111 below the bath 11111
MERRICA ACCESSORIES	BATH	SANTAI SPA BATH	CONTOUR SPA BATH	DOLCE VITA SPA BATH
EZI Frame/Base Support Frame	Optional	Optional	Optional	~
EZI Feet (1665mm & 1650mm)	Optional	Optional	Optional	Optional
FIORE Headrest (Black/White)	Optional	Optional	✓ x 1	✓ x 1
Overflow	Optional	Optional	Optional	Optional
Plug & Waste	Optional	Optional	Optional	Optional



MERRICA INSET BATH/SPA BATH WITH TILE BEAD (1525 & 1665) | ISLAND BATH (1653) - Premium Sanitary Grade Acrylic, High Gloss White



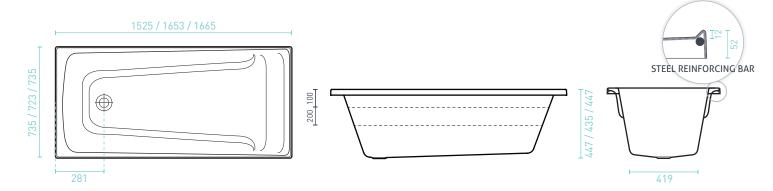

SPA BATH ORDER FORM

Spa baths are made to order on receipt of the order form & are non-refundable. Please allow 15 working days for completion & dispatch. We recommend filling out your SPA BATH ORDER FORM with your qualified spa bath installer.

	DATE:	
CONTACT: ORDER NO:	DATE:	
MODEL: SIZE:	QTY: RANGE SANTAI CONTOUR DOLCE VITA	
EZI FRAME (RRP from \$115) Supplied □ Factory Fitted (Additional cost) □ B	JMP UPGRADE Sensa-Touch Pad Control 3-Stage Heat (RRP \$425) □ ASE SUPPORT FRAME Factory Fitted (RRP \$325) □ //ERFLOW (RRP from \$120) □	
	ASE SUPPORT FRAME Factory Fitted (RRP \$325) VERFLOW (RRP from \$120)	
DOLCE VITA SPA BATH OPTIONS HEADREST COLOUR (N0 extra cost) White □ Black □ J OVERFLOW (RRP from \$120) □	ET COLOUR (NO extra cost) Chrome White Black 💿 💿 🕒	
- The spa pump does not fit directly in the baths perimeter (allow 100mm) - The spa pump must be easily accessible for maintenance - Waste positions can not be changed - The spa pump controls will always be at the front, unless indicated below - We recommend spa pumps installed outside are fitted with a Spa Pump Cover (RRP \$199) Please refer to the technical drawings before choosing your spa pump position, as spa bath waste & pump positions CAN NOT be customised 1. CIRCLE YOUR PUMP POSITION A / B / C / D ON THE DIAGRAM 300mm of pipework & 2 elbows are supplied to install the pump in the correct orientation. If extra pipework is required, how much?mm (max. recommended distance between the spa bath & pump is 1.2m) 2. CROSS (X) YOUR SHOWER HEAD POSITION ON THE DIAGRAM (if applicable) Spa pump controls can not be on the same end as the shower.		
	JSTOMER SIGNATURE:	



DECINA.COM.AU 1300 DECINA (1) (2) (2)



*Whilst every effort is made to adhere to published jet & fittings positions, variation to specifications may occur without notice.