


3 METRE ALUMINIUM ANGLE



- Aluminium angle for tile edge protection
- Used where tile meets carpet, wooden floors etc.
- Creates an attractive finish if used on external corners

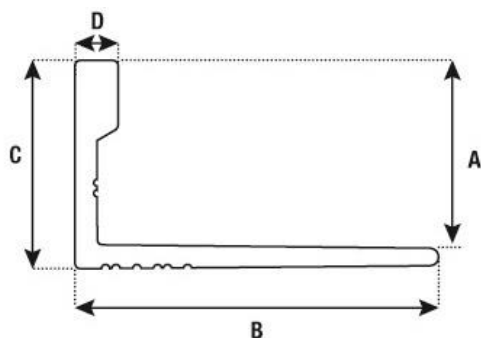

Size A	B	C	D
4.5mm	21mm	5.2mm	2.5mm
6mm	21mm	7.2mm	2.5mm
8mm	21mm	9.2mm	2.5mm
9mm	21mm	10.2mm	2.5mm
10mm	21mm	11.2mm	2.5mm
11mm	21mm	12.5mm	2.5mm
12.5mm	21mm	13.7mm	2.5mm
13mm	21mm	14.2mm	2.5mm
15mm	21mm	16.2mm	2.5mm
18.5mm	21mm	19.7mm	2.5mm
20mm	21mm	21.2mm	2.5mm
22mm	21mm	23.2mm	2.5mm
25mm	21mm	26.2mm	2.5mm



CHEMICAL CONTENT

STANDARD	SILICONE (%)	IRON (%)	COPPER (%)	MANGANESE (%)	MAGNESIUM (%)	CHROMIUM (%)	ZINC (%)	TITANIUM (%)	OTHER (%)	ALUMINIUM (%)
(DIN/BS) EN 573-3;1994 (DIN/BS) EN 755-2;1997	0.20-0.60	0.35	0.1	0.1	0.45-0.90	0.1	0.1	0.1	0.15	Rem

MECHANICAL PROPERTY

STANDARD	DIMENSION	0.2% PROOF STRESS MINIMUM (N/mm2)	TENSILE STRENGTH MINIMUM (N/mm2)	ELONGATION (%)	ELONGATION ON 50mm (%)
(DIN/BS) EN 573-3;1994 (DIN/BS) EN 755-2;1997	<=3	130	175	8	6
	3<e<=25	110	160	7	5