

Water Filtration

Filter System
Made in the USA
Patent Protected


Certified by
the
NSF

WaterMark
AS3497
Lic. WM-022045
IAPMO R&T OCEANA

All dimensions in mm

FS5010

Inline Water Filtration System for Standard Water Use

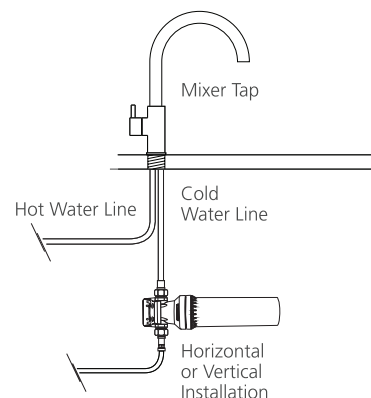

Specifications /

Micron rating	1 micron with limescale reduction
Maximum flow rate	0 - 8L per minute
Temperature rating (min / max)	2°C - 38°C
Capacity	56,700 litres or 1 year, whichever comes sooner †
System connection required	1/2" bsp
Water Pressure	100 - 860 kPa (can be installed with a pressure limiting valve)
Installation	Vertical or horizontal
Space required <small>(allows for cartridge replacement)</small>	Vertical installation: 460 mm height, 225 mm width Horizontal installation: 225 mm height, 460 mm width
Carton size	333 x 189 x 102 mm
Product weight	2 kg
Replacement cartridge model	FR5910
Warranty	6 years (refer to oliveri.com.au)
Maintenance and care instructions	Filter cartridge replacement required after 56,700 litres or annually. Filter change alarm monitor included.

Inclusions /

- Oliveri inline filter cartridge (FR5910)
- Filter change alarm monitor
- Dual check non-return valve
- Stainless braided pex hose 550mm
- Hex nipple adaptor
- Head assembly with mounting bracket
- Mounting screws and plumbers tape
- Installation instructions

Matching accessories /



FR5910
Replacement
Cartridge