

DTA ALUMINIUM BALCONY TRIM WITH WEEP HOLES

DATA SHEET REF: DTA_ALBTW001

- Balcony trim has been designed to stop watermarks forming on balcony fascias
- The lip design at the bottom of the trim stops any water from running down the fascia
- Ideal for domestic or commercial application
- Available in 3metre lengths
- The patented joining system makes for easy installation. (ALBTJ)
- Internal (ALBTIC) and external (ALBTEC) corners available
- Weep holes are located every 300mm



| Aluminium Balcony Trim with Weep Holes (3 Metre Lengths) | | | | | |
|--|-----------|---------------------------|--------------------------|---------------------------------|--|
| Height (MM) | Base Code | Standard Colours | Made to order Colours | Production Drawing Reference | |
| 8 | ALBTW3.08 | Plain Matt Silver (MS) | White (W) Black (BK) | ALBTW3.08V001 | |
| 10 | ALBTW3.10 | | | ALBTW3.10V001 | |
| 12 | ALBTW3.12 | | | ALBTW3.12V001 | |
| 8 | ALBTWIC08 | | | ALBTWIC08V001 | |
| 10 | ALBTWIC10 | | | ALBTWIC10V001 | |
| 12 | ALBTWIC12 | | | ALBTWIC12V001 | |
| 8 | ALBTWEC08 | | | ALBTWEC8V001 | |
| 10 | ALBTWEC10 | | | ALBTWEC10V001 | |
| 12 | ALBTWEC12 | | | ALBTWEC12V001 | |

| Standards | | | | |
|--------------------|--------------------------|--|------|--|
| | (DIN/BS) E (DIN/BS) E | | | |
| Chemical Co | ntent | | | |
| Silicone % | 0.20-0.60 | | | |
| Iron % | 0.35 | | | |
| Copper % | 0.1 | | 0.29 | |
| Manganese % | 0.1 | | | |
| Magnesium % | 0.45-0.90 | | Tei | |
| Chromium % | 0.1 | | | |
| Zinc % | 0.1 | | | |
| Titanium % | 0.1 | | | |
| Other (each 0.05%) | 0.15 | | | |
| Aluminium % | Rem. | | | |
| ALLOY: | 6063 | | TEM | |


| JO 2.1001 | | | | |
|-------------------------------|---------------------------|--|--|--|
| Mechanical Properties | | | | |
| Dimension (mm) | | | | |
| <=3 | 3 <e<=25< td=""></e<=25<> | | | |
| 0.2% Proof Stress Min (N/mm2) | | | | |
| 130 | 110 | | | |
| Tensile Strength Min (N/mm2) | | | | |
| 175 | 160 | | | |
| Elongation (%) | | | | |
| 8 | 7 | | | |
| Elongation on 50mm (%) | | | | |
| 6 | 5 | | | |
| TEMPER: | T5 | | | |


l 573-3:1994


| Plain | Matt Silver | | | |
|-----------------------|-------------|--|--|--|
| Made to Order Colours | | | | |
| White | Black | | | |


Standard Colours


| Features | | | | | | |
|----------|---------------|---------------------|---------------|--|--|--|
| | Applications | Standard Colours | Made to order | | | |
| | Water Barrier | ~ | ~ | | | |
| மி | Outdoors | ~ | ~ | | | |
| | Coastal | ~ | ~ | | | |
| | UV Resistant | ~ | ~ | | | |

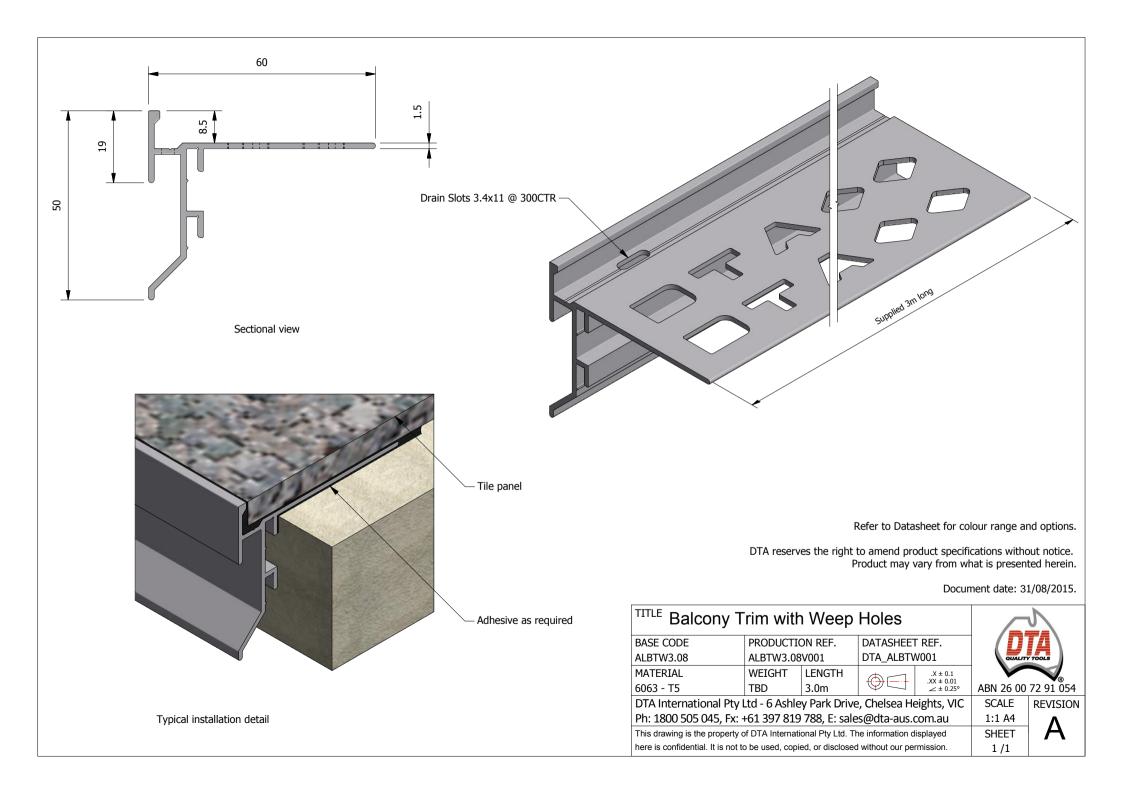

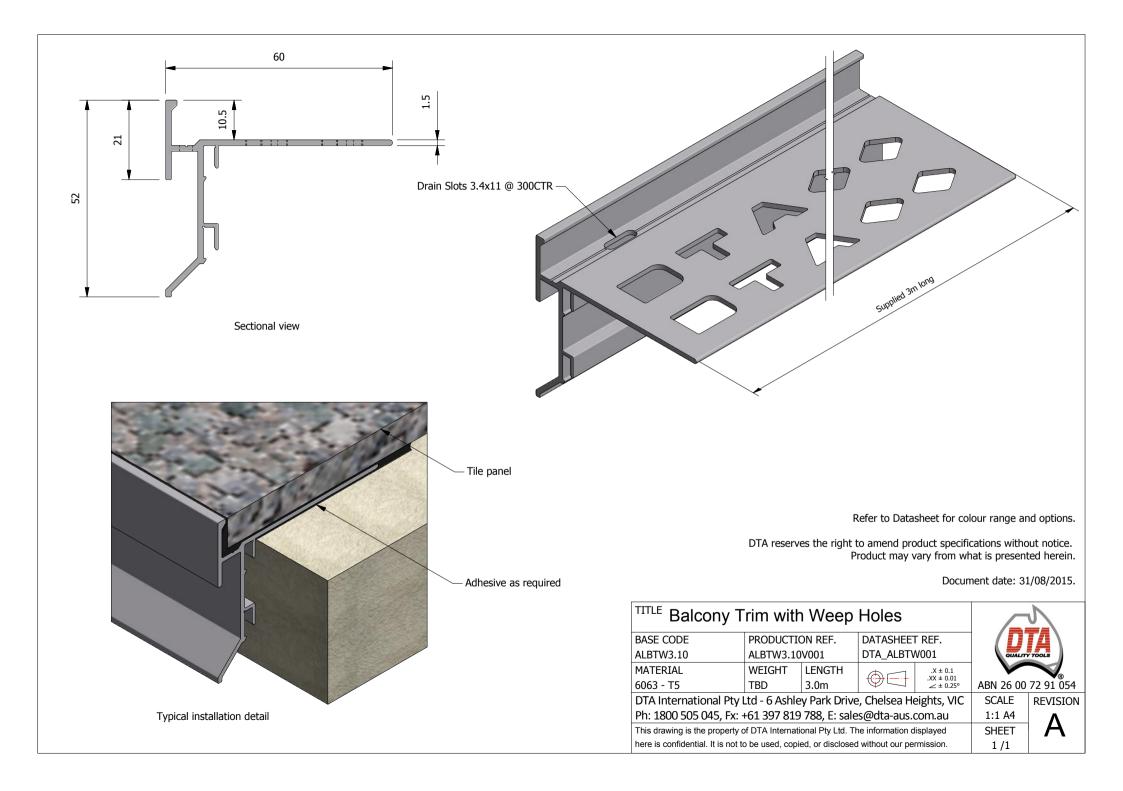

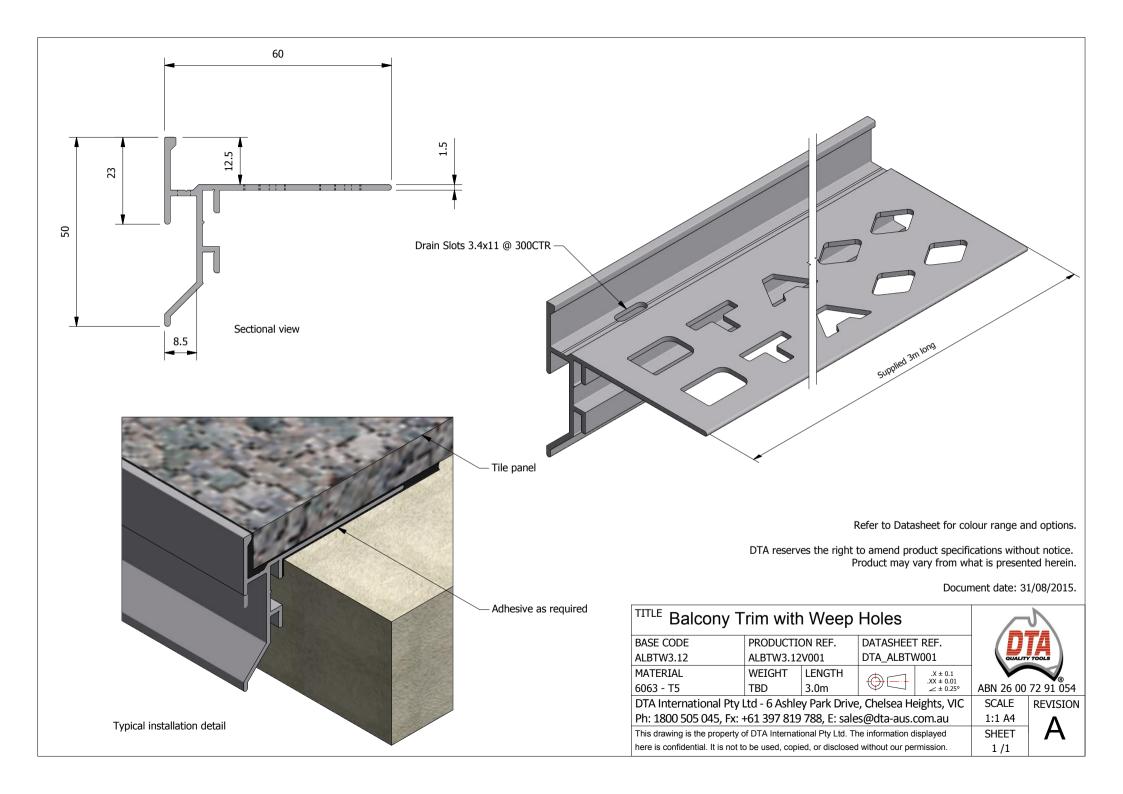

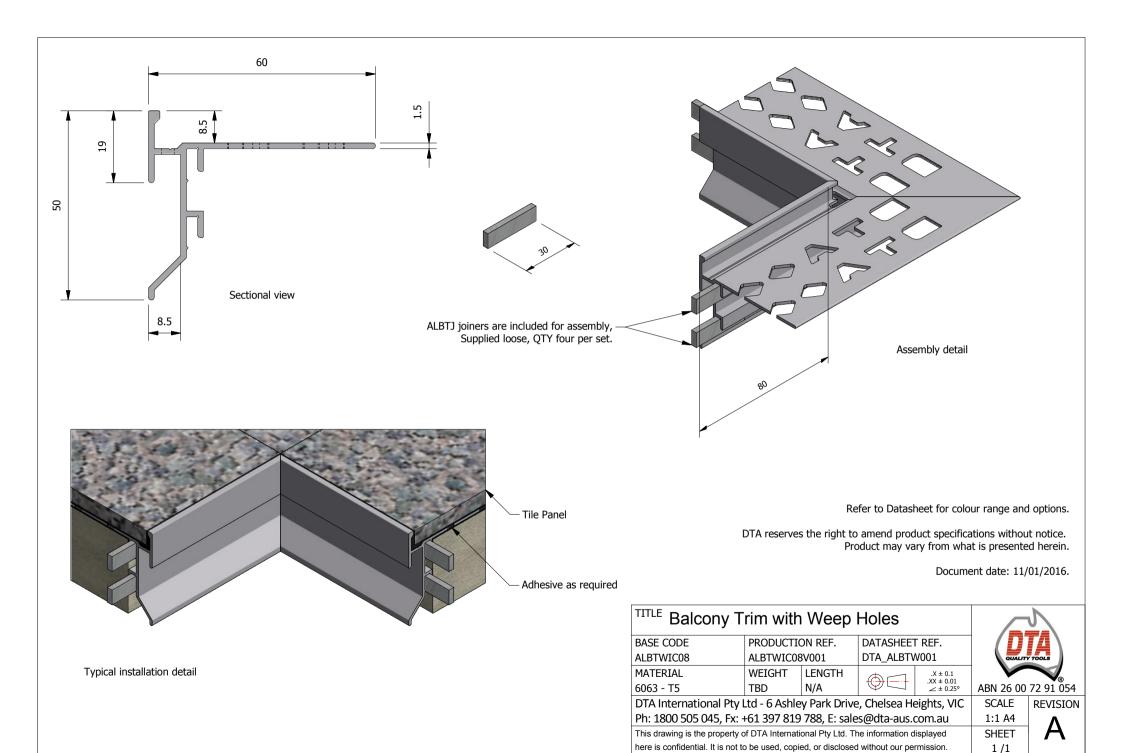

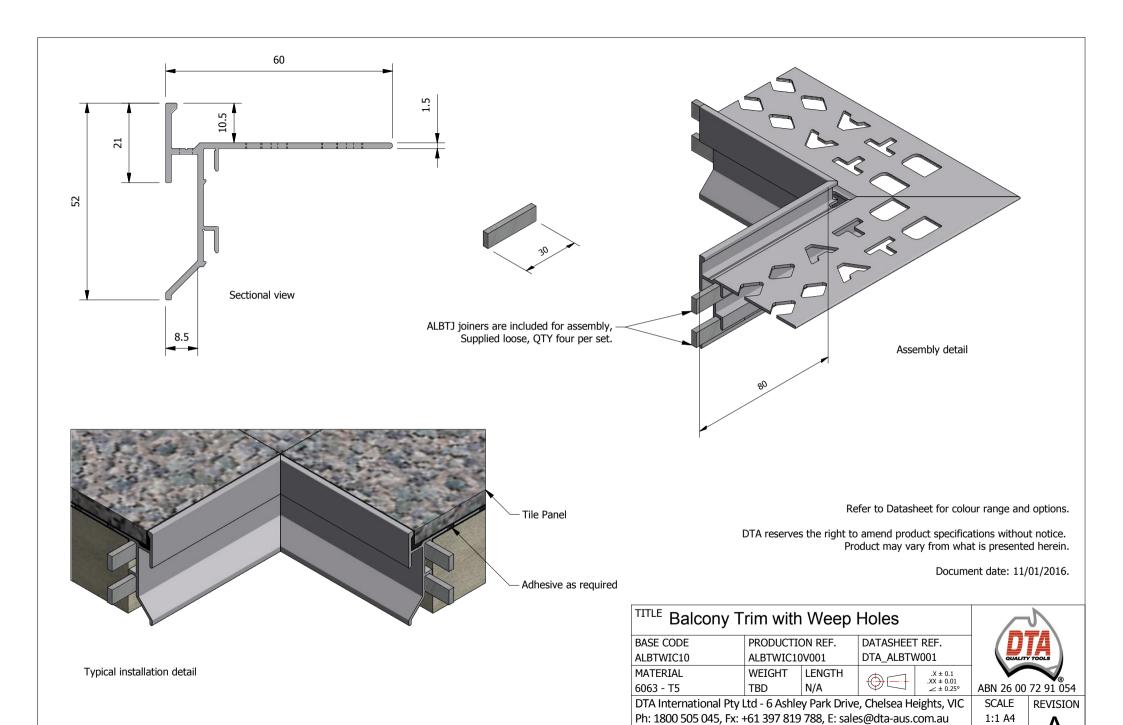

SHEET

1 /1

This drawing is the property of DTA International Pty Ltd. The information displayed here is confidential. It is not to be used, copied, or disclosed without our permission.

